
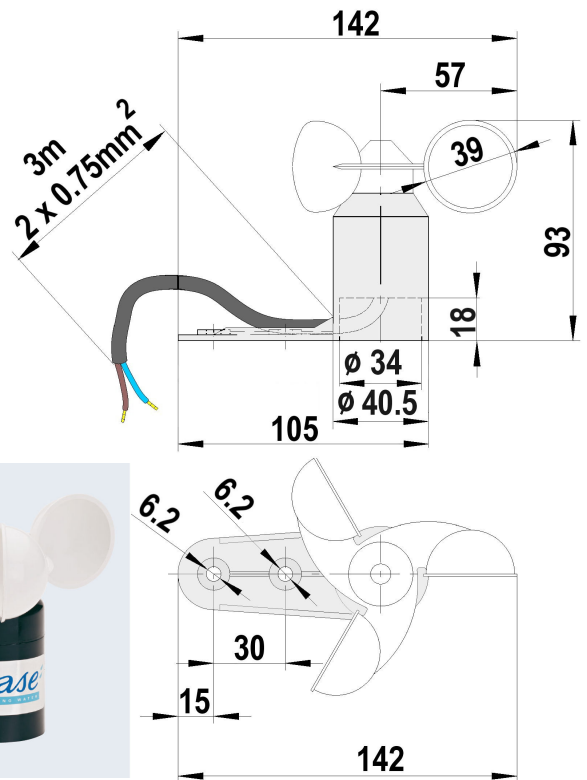


OASE GmbH
 Tecklenburger Straße 161
 D - 48477 Hörstel
 Phone: +49(0)54 54 – 800
 Fax: +49(0)54 54 – 80 322
 info@oase-livingwater.com
 www.oase-livingwater.com

Anemometer K

53913

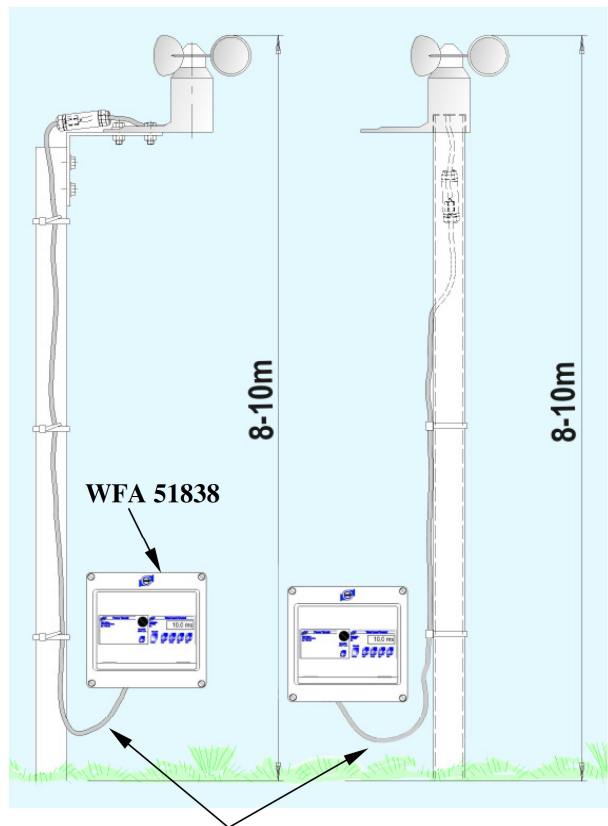

Kabel: ab 20m Kabellänge abgeschirmtes Kabel verwenden
 Cable: starting from 20m cable length, please use screened cable

Wartungsfrei / maintenance-free

Technische Daten / technical data

Messbereich /measuring range	0,5 - 40 m/s
Elektr.Anschluss / electric connection	24 V DC
Auflösung / resolution	0,4m – Windweg / wind path
Kontaktart / type of contact	1 Reedschalter / reed switch
Belastung / load	max. 60 m/s kurzzeitig / temporary
Umgebungstemp./ ambient temperature	- 20 ° C + 60 ° C
Zuleitung/input line	2x0,75mm² 3m

		Anemometer K		Anemometer K	
Dimensions (L x W x H)	[mm]	145 x 104 x 93	Abmessungen (LxBxH)	[mm]	145 x 104 x 93
Housing		plastic	Gehäuse		Kunststoff
Protection class		IP 54	Schutzart		IP 54
Voltage	[V / Hz]	24V DC	Spannung	[V / Hz]	24V DC
Switch/button		–	Schalter/Taster		–
Indicator light		–	Leuchtmelder		–
Control lines		–	Steuerleitungen		–
Contact load	[A]	–	Kontaktbelastung	[A]	–
Weight	[kg]	0.8	Gewicht	[in kg]	0,8
Order no.		53913	Bestell-Nr.		53913

The information contained in this data sheet is the sole property of OASE GmbH. Any reproduction in part or as a whole without the written permission of OASE GmbH is prohibited.